

FIREFREE EXTERIOR SYSTEM

Specifications:

- Fire retardant, Firefree Class A intumescent Coating
- Top coat, FfE Acrylic Exterior Latex

Material Thickness

20 DFT (30 WFT)

6 DFT (12 WFT)


Coverage Rate

53 sq.ft/gallon

110 sq.ft/gallon

Please reference the product's application instructions for surface preparation guidelines

Completed Projects

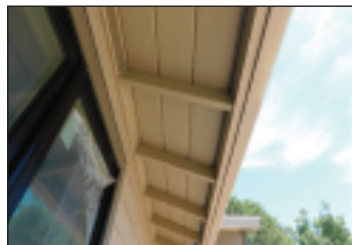

Exterior Wood Eaves/Soffits



www.firefree.com



FIREFREE EXTERIOR SYSTEM

The Firefree Exterior System is the first and only intumescent coating system that meets the ASTM fire and weatherization standards for wildfire protection in the Wildland Urban Interface (WUI). The Firefree Wildfire System is the first and only intumescent as prescribed in the California Building Standards Code Section 704A (materials and construction methods for Exterior Wildfire Exposure) and the International Code Council (ICC).

- Tested to all ASTM WUI code standards
- Fire ignition resistant, ICC listed
- Weather resistant, ICC listed
- Easy to use and cost effective
- High quality exterior finish
- Firefree Exterior System will assist property owners comply with risk mitigation standards

FEATURES

